


Introducing the New Improved Pedestrian/Cycle Friendly Heavy Duty Gully Grate & Frame

- The new Durey Castings DU5801M is the ideal grate where cyclists/pedestrian traffic occur.
- Rated to D400 loading the grate can be used in the carriageway .
- Although small mesh the waterway is still a generous 925 cm².
- Added security is in the form of end hinging to suit traffic direction.

DESIGN FEATURES :

- **Material :**
Ductile Iron to ISO 1083 / EN1563, Grade 500-7.
- **Place of installation :**
Are indicated in accordance to EN124 : 1994
Group 3 : For gully tops installed in the area kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0.5 m into the carriageway and a maximum of 0.2 m into the footway, and lower group.
- **Design load :**
400 kN, to EN 124 : 1994
- **Coating :**
Non toxic waterbased black paint.
- **Product certification :**
Kitemark.

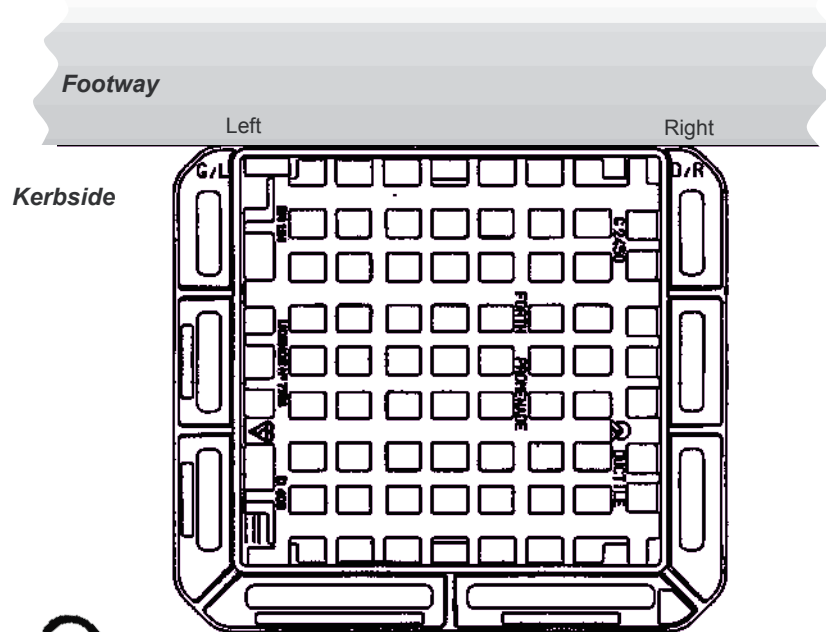

SPECIAL FEATURES :

- **Hinging :**
At either end to suit traffic direction and meet changes in traffic direction without removing the frame.
- **Securing :**
Hinged grating captive within frame.
- **Grid :**
Designed for pedestrian areas and also for lift trucks or small wheeled cars traffic.
- **Waterway :** 925 cm²
- **Mass :**

Grating	: 27.8 kg
Frame	: 26.2 kg
Total	: 54 kg

